

Disclaimer: Drawings produced by DANOSA UK should be considered non-scalable and for illustrative purposes only. Issued design principals form instructions for the installation of DANOSA UK materials only and should be considered as part of an overall design rather than in isolation. Product 'Technical Datasheets' are available for all DANOSA UK products and should be consulted in conjunction with all issued DANOSA UK installation instructions. Drawings are subject to copyright and should not be reproduced without permission.

Drawing Notes:


The structural substrates should be primed in accordance with the project specification. Substrates shown in this drawing are for illustrative purposes only.

Note A:

Where a full bond to the substrate is required, or where ESTERDAN 30 P ELAST SEMIADHESVIO is used as the underlay, GLASDAN 800 PERFORADO does not form part of the system.

Note B:

Drip card former to be mechanically fastened at 200mm centres. Alternatively, 2 staggered lines of roofing grade clout nails secured at 150mm centres on each staggered line.

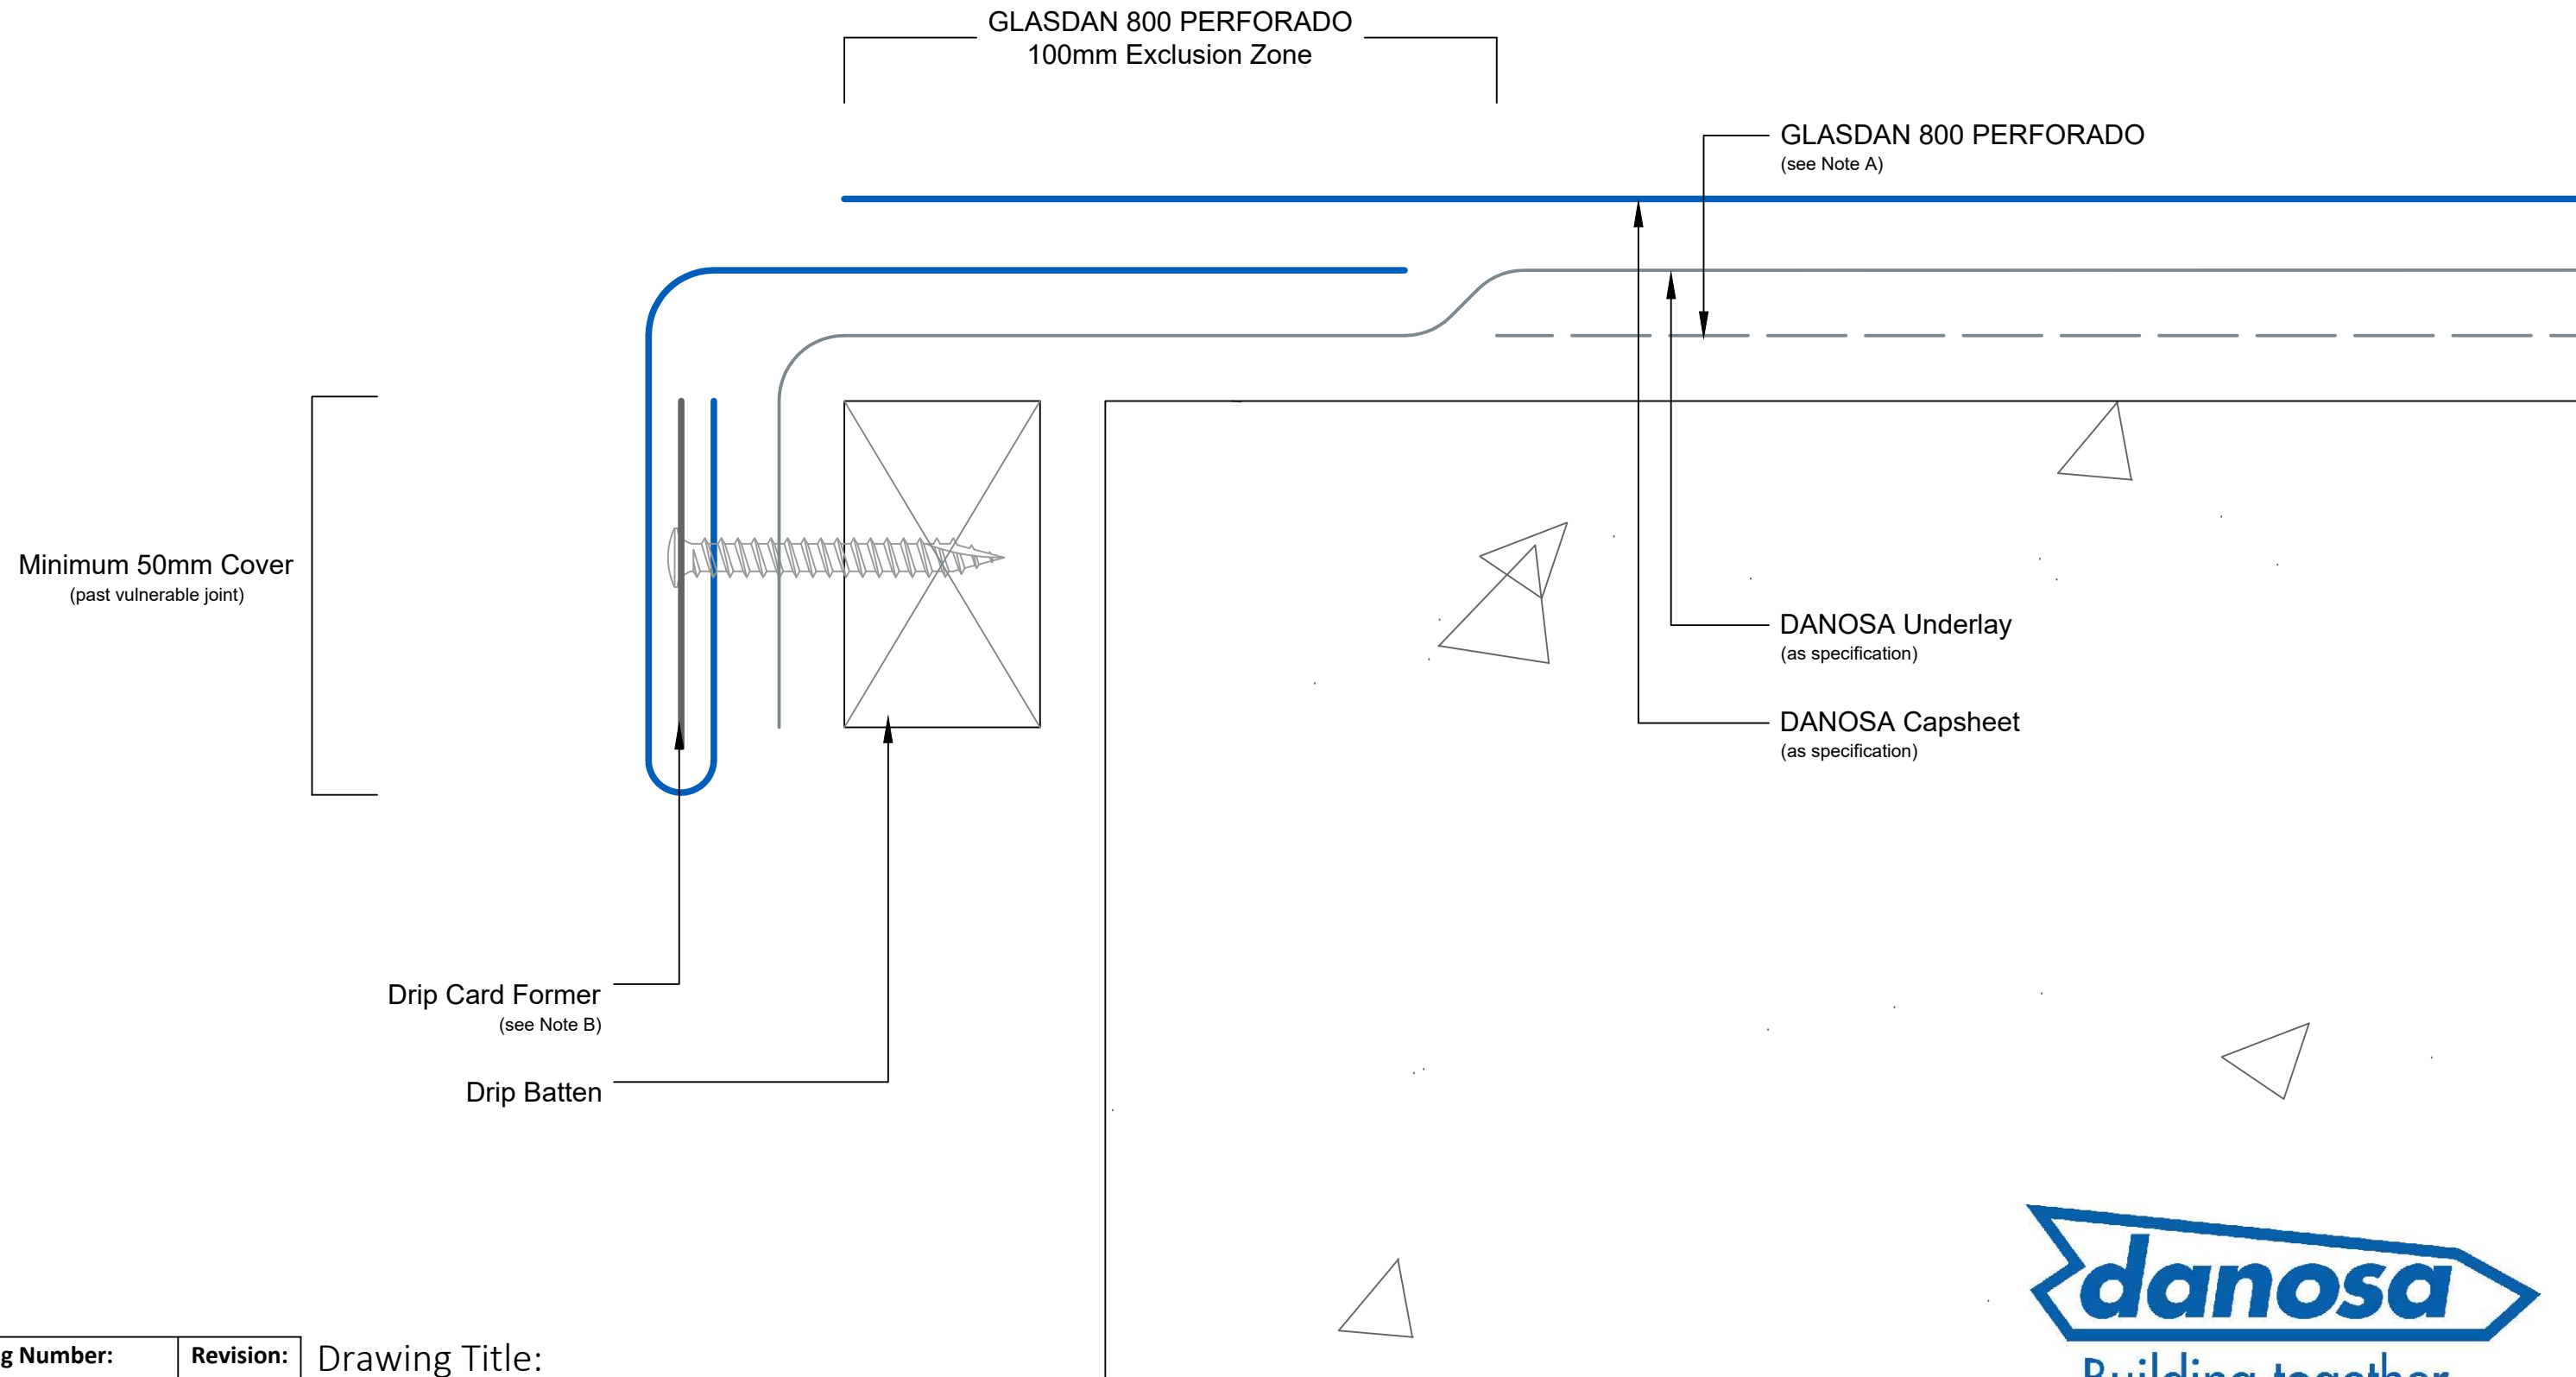

Drawing Number: DUK-B-(G)-220C	Revision: 00
Date Drawn: March 2017	Author: SL

Drawing Title:
Traditional Trim
Bituminous Membranes - Cold Roof

