


Drawing Notes:

All mechanically fastened vertical work should be installed as illustrated with sheets no wider than 1.08m are laid vertically and mechanically fastened on the side overlaps.

All DANOPOL membrane hot-air welds should be between 30-40mm. Overlaps should provide sufficient cover to accommodate this requirement.

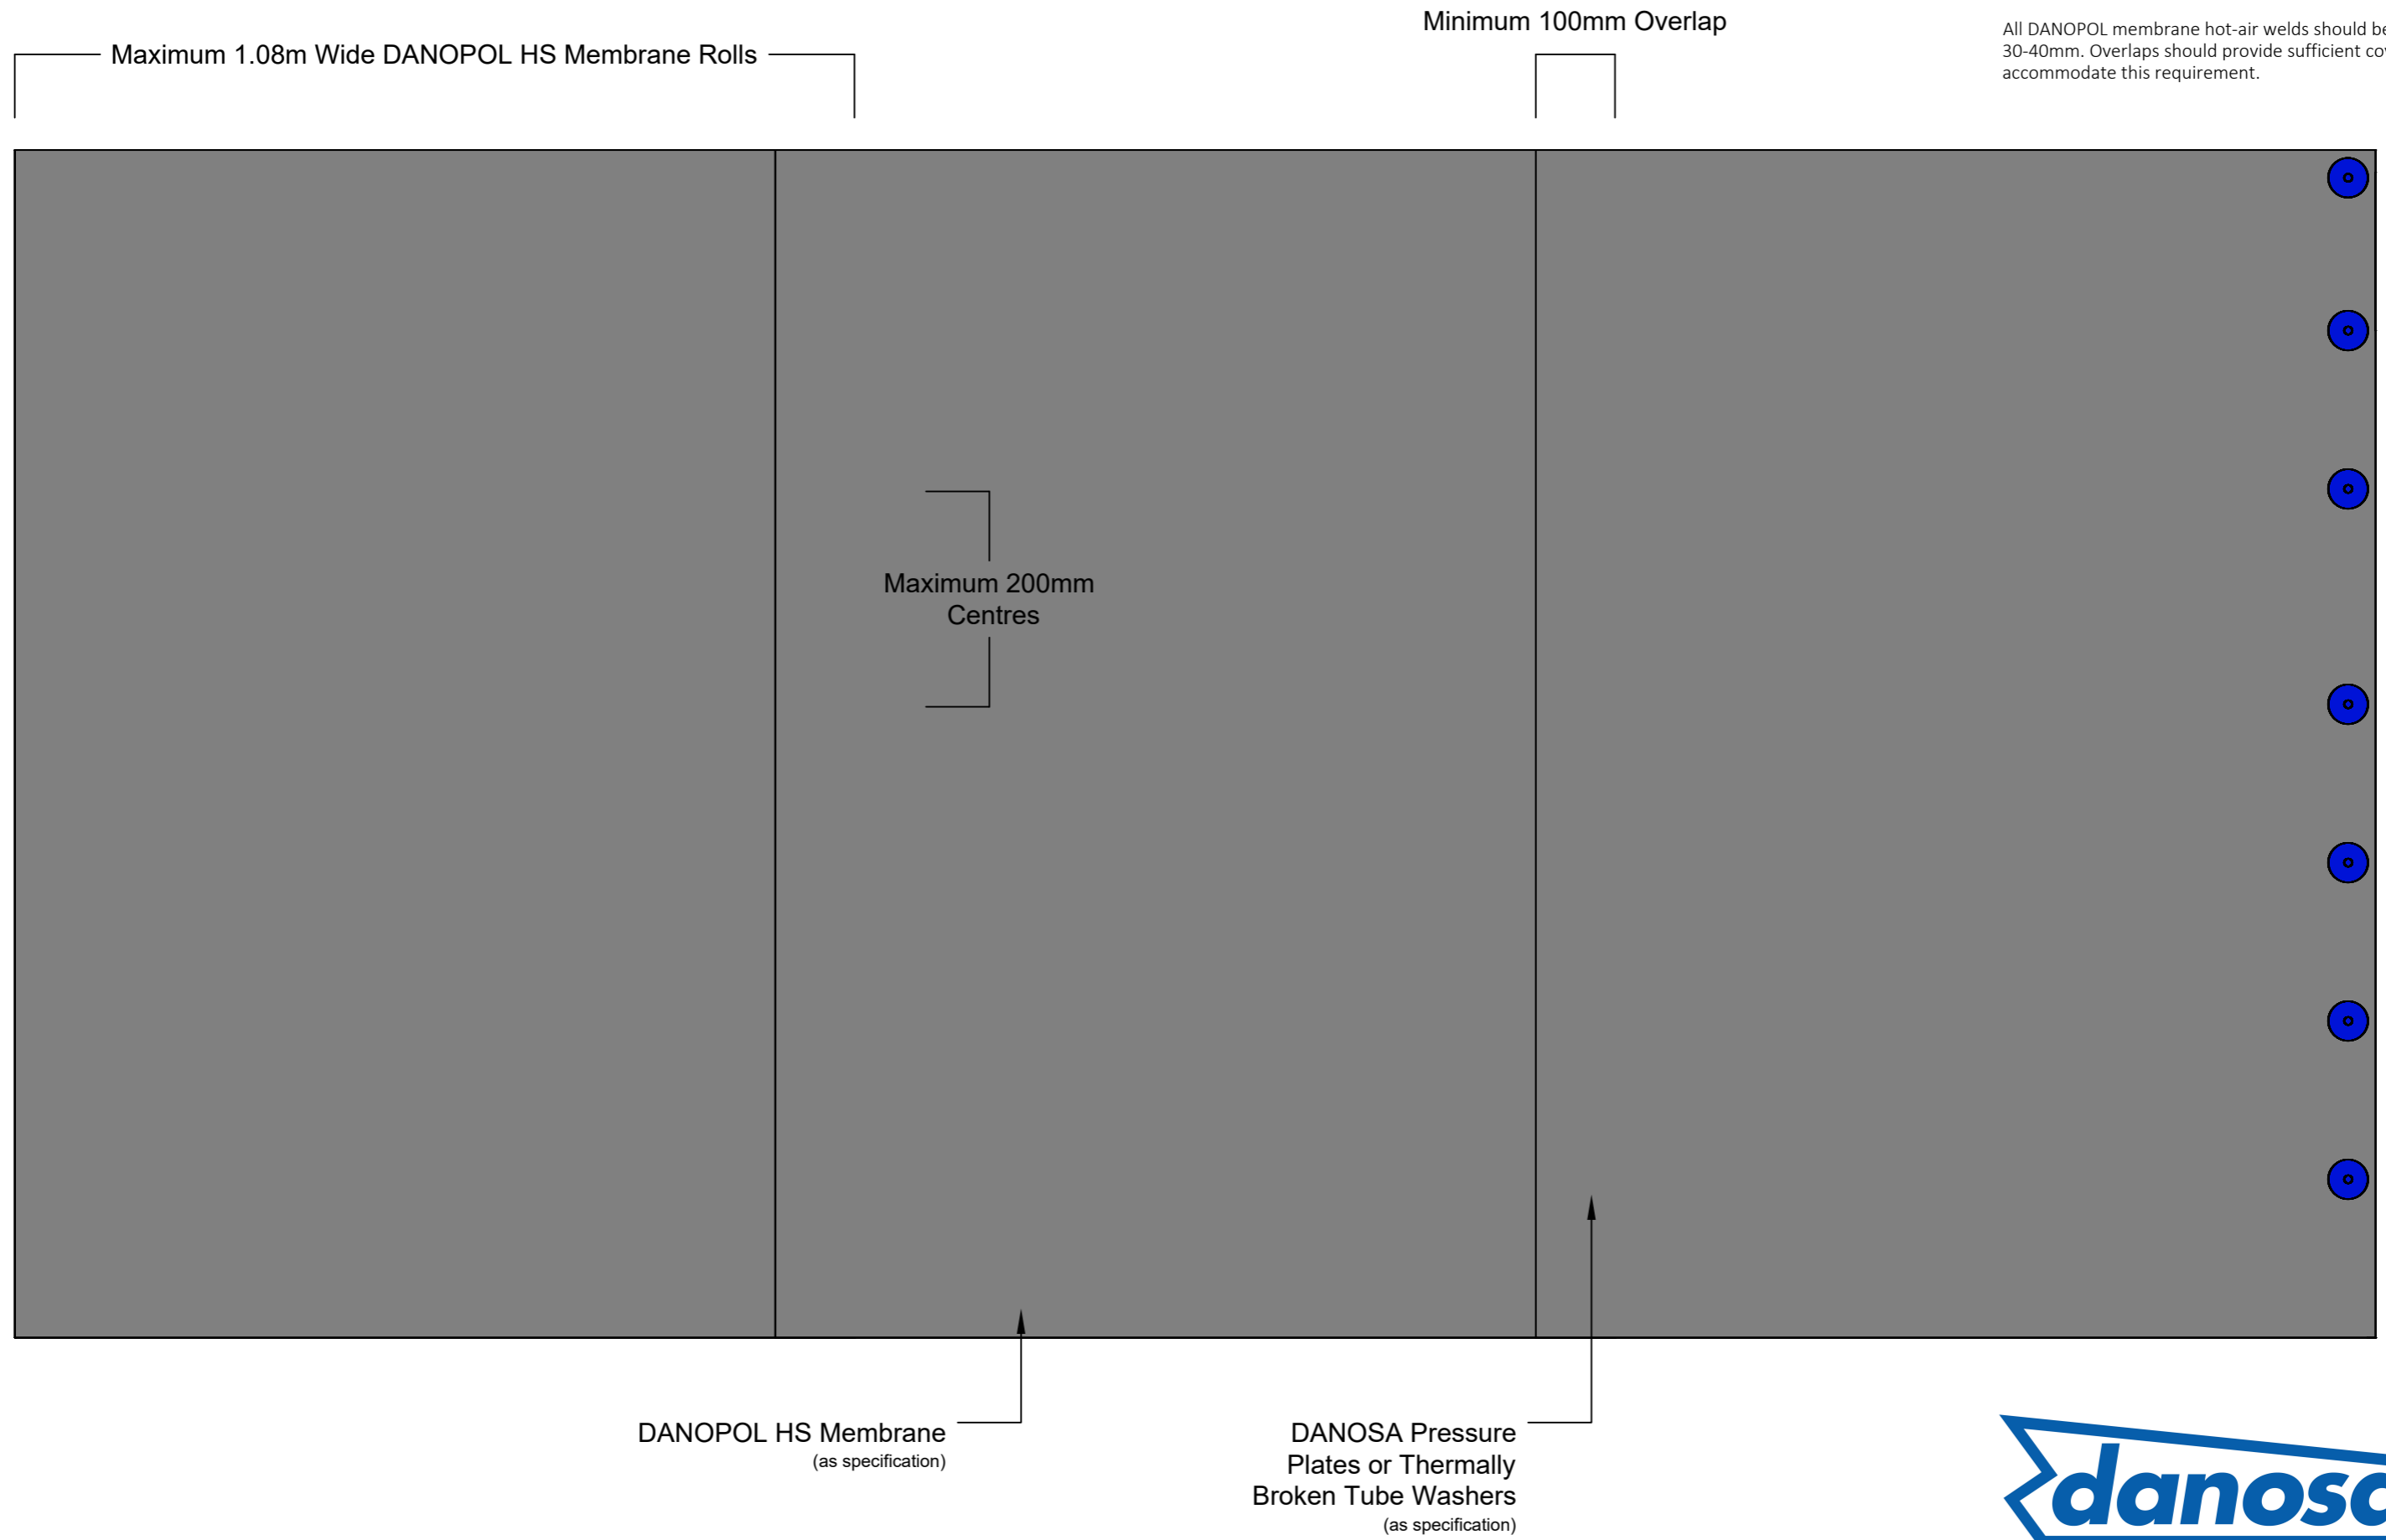

Drawing Number: DUK-S-(M)-105	Revision: 01
Date Drawn: March 2017	Author: SL

Drawing Title:
Mechanically Fastened Vertical Works 500mm or Higher
Mechanically Fastened DANOPOL® Single Ply Membranes



Building together

DANOSA UK Limited

Tel: 0845 074 0553 | www.danosa.co.uk | uktechnical@danosa.com