

Disclaimer: Drawings produced by DANOSA UK should be considered non-scalable and for illustrative purposes only. Issued design principals form instructions for the installation of DANOSA UK materials only and should be considered as part of an overall design rather than in isolation. Product 'Technical Datasheets' are available for all DANOSA UK products and should be consulted in conjunction with all issued DANOSA UK installation instructions. Drawings are subject to copyright and should not be reproduced without permission.


Drawing Notes:

Structural substrates shown in this drawing are for illustrative purposes only. However, this detail which does not require any mechanical restraint can only be applied to timber or plywood substrates under 1000mm in girth.

All DANOPOL membrane hot-air welds should be between 30-40mm. Overlaps should provide sufficient cover to accommodate this requirement.

Gutters should be a minimum of 300mm wide. Localised sumps should be no greater than 500 x 500mm square.

Note A:
Mechanical termination of waterproofing using DANOSA pressure plates, mechanically fastened at 200mm centres.

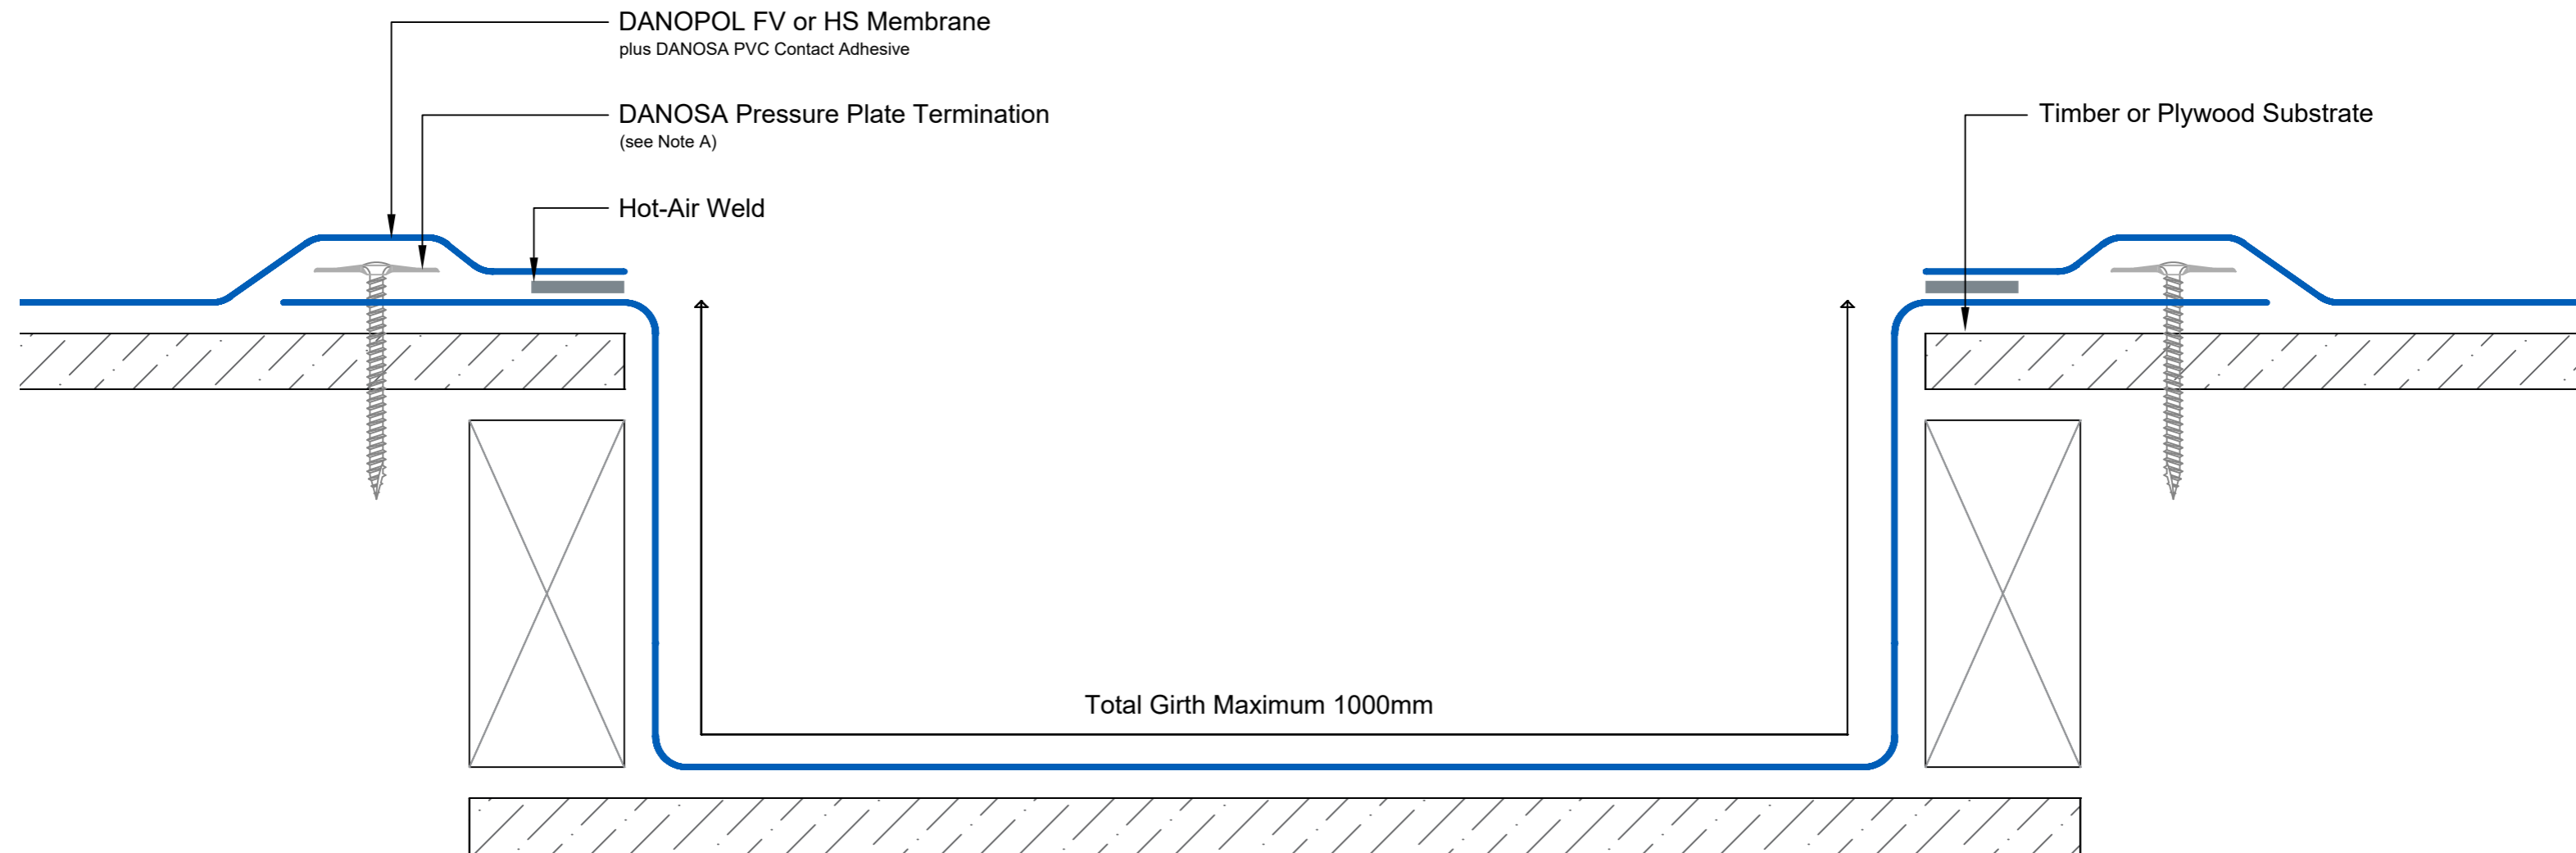

Drawing Number: DUK-S-(A)-234C	Revision: 01
Date Drawn: February 2019	Author: SL

Drawing Title:
Gutter / Sump Under 1000mm Girth (Non-Fleecebacked Membrane)
Adhered DANOPOL® Single Ply Membranes - Cold Roof



Building together

DANOSA UK Limited

Tel: 0845 074 0553 | www.danosa.co.uk | uktechnical@danosa.com