


Disclaimer: Drawings produced by DANOSA UK should be considered non-scalable and for illustrative purposes only. Issued design principals form instructions for the installation of DANOSA UK materials only and should be considered as part of an overall design rather than in isolation. Product 'Technical Datasheets' are available for all DANOSA UK products and should be consulted in conjunction with all issued DANOSA UK installation instructions. Drawings are subject to copyright and should not be reproduced without permission.

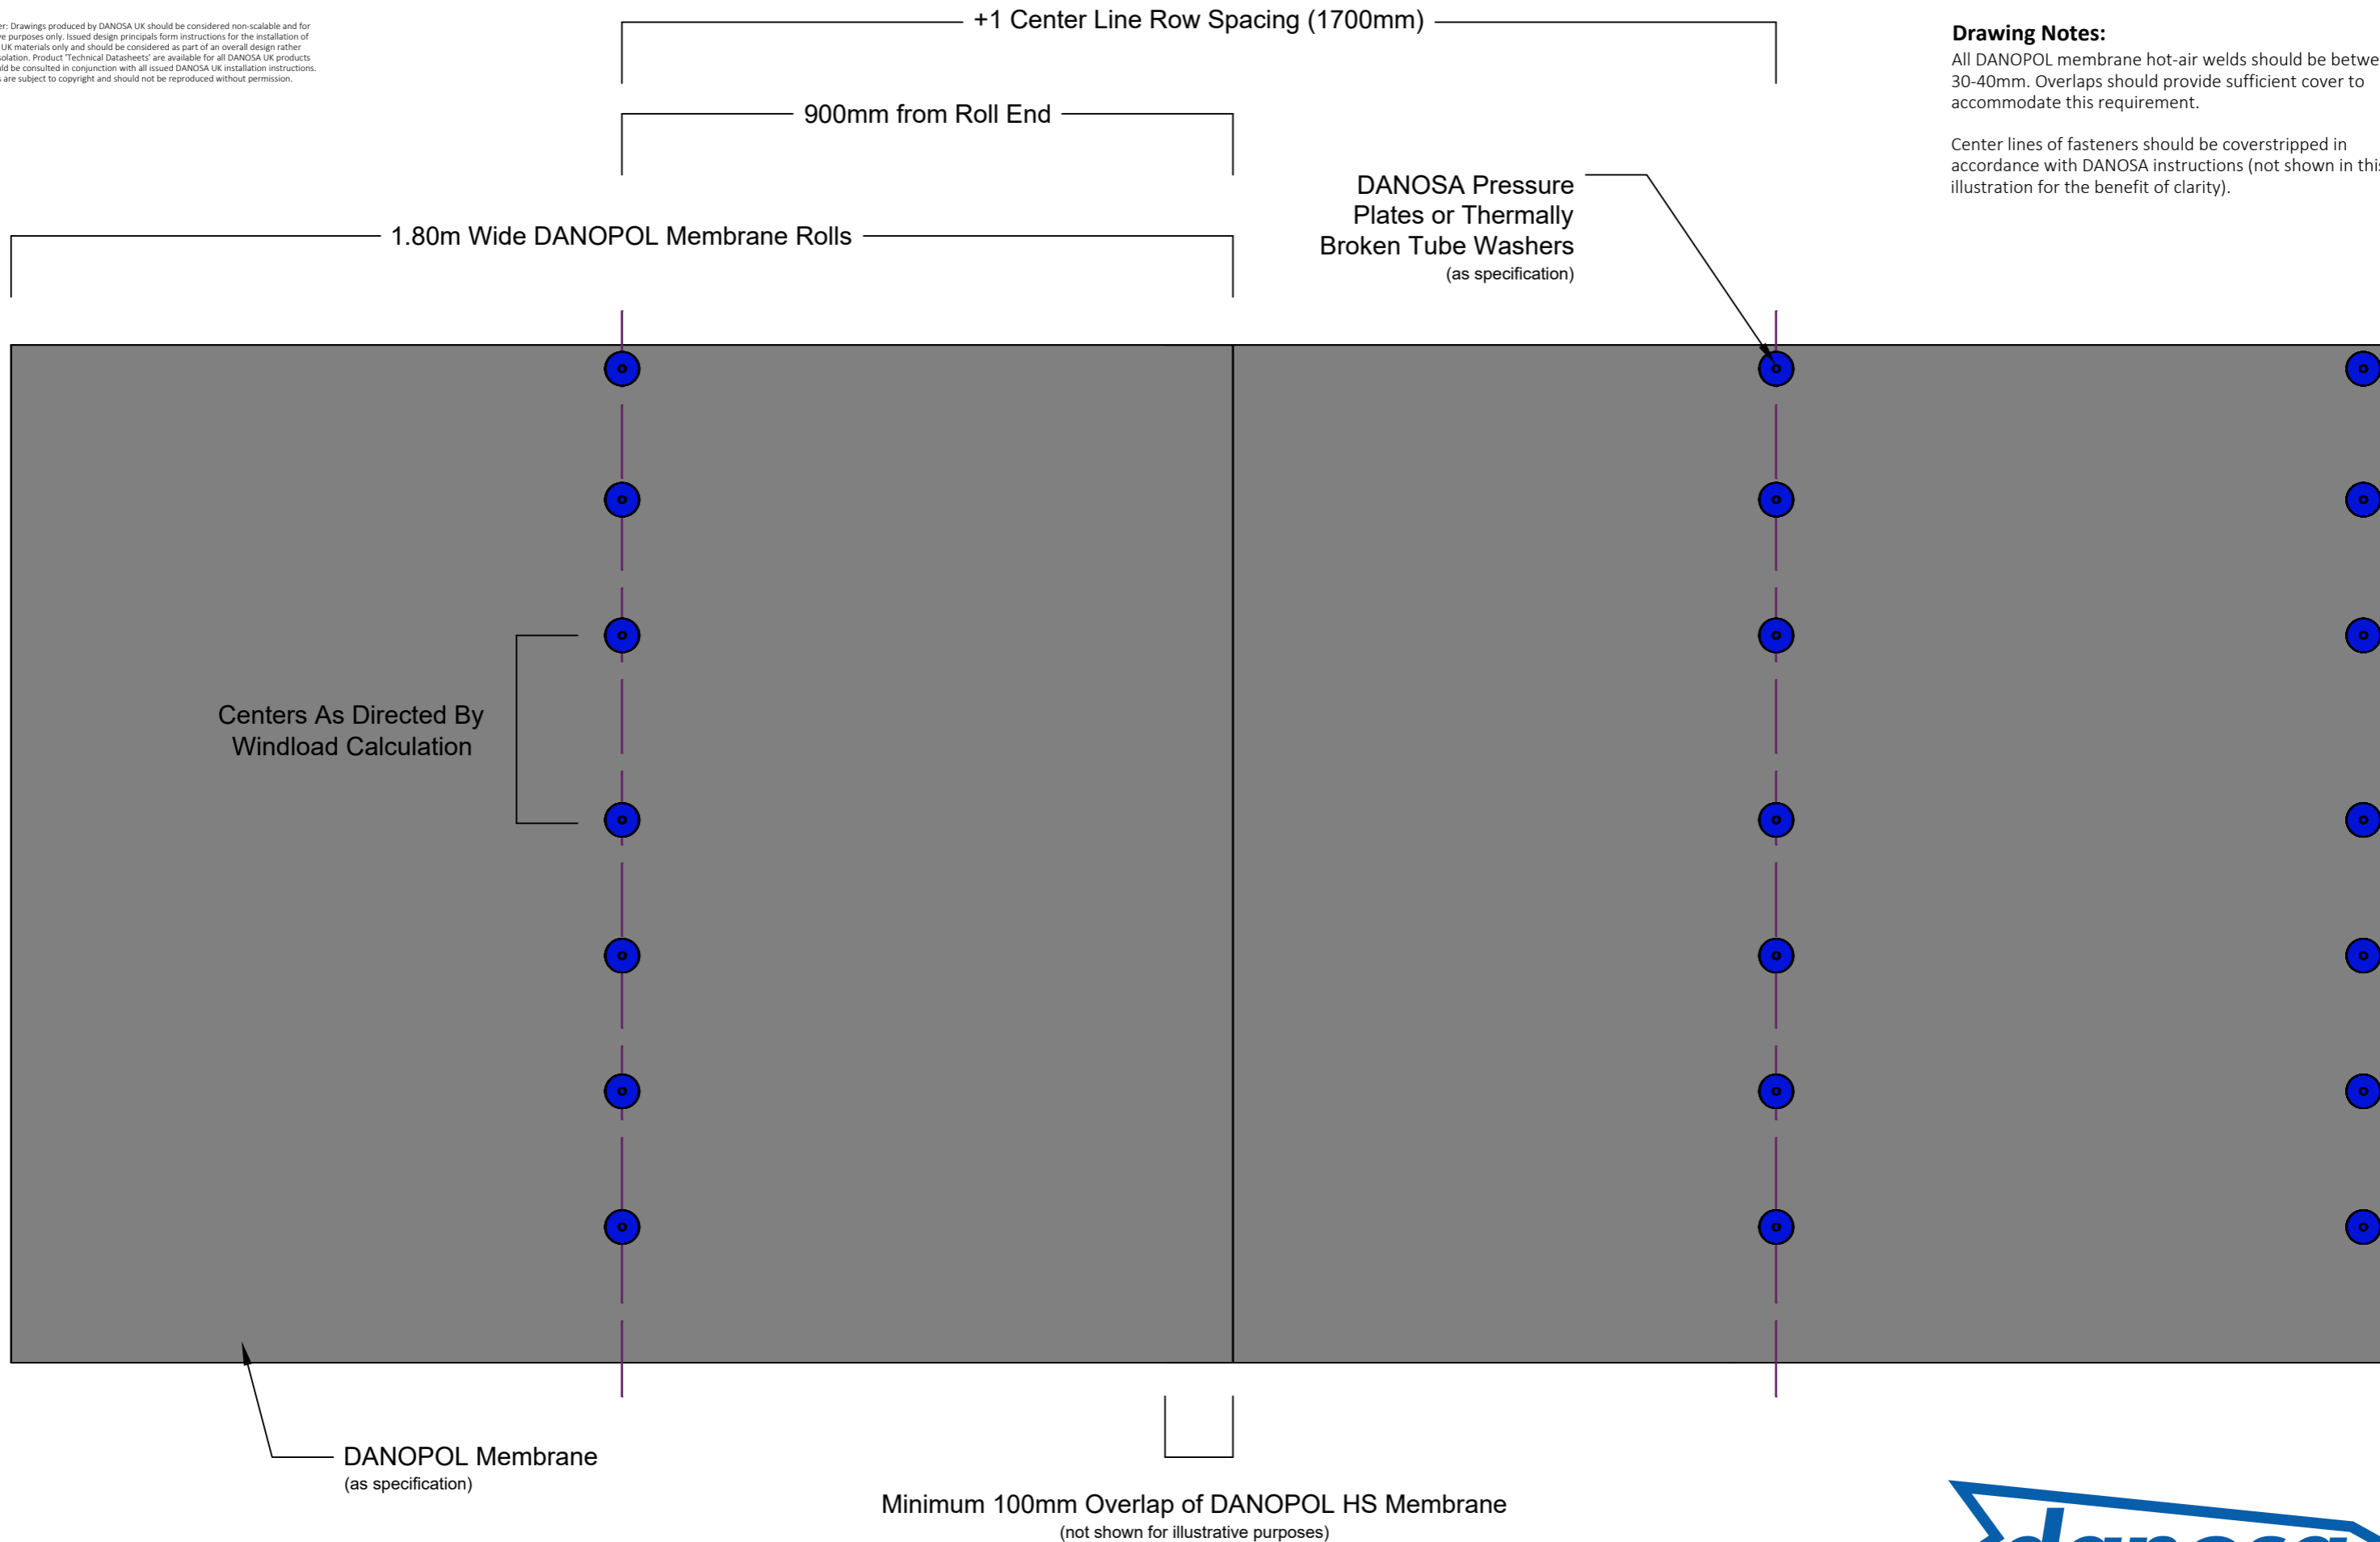

**Drawing Notes:**

All DANOPOL membrane hot-air welds should be between 30-40mm. Overlaps should provide sufficient cover to accommodate this requirement.

Center lines of fasteners should be coverstripped in accordance with DANOSA instructions (not shown in this illustration for the benefit of clarity).

<b>Drawing Number:</b> DUK-S-(M)-111	<b>Revision:</b> 00
<b>Date Drawn:</b> February 2019	<b>Author:</b> SL

**Drawing Title:**  
Windload Calculation +1 Centre Lines (1.80m Wide Roll)  
Mechanically Fastened DANOPOL® Single Ply Membranes



Building together

DANOSA UK Limited

Tel: 0845 074 0553 | www.danosa.co.uk | uktechnical@danosa.com