


Disclaimer: Drawings produced by DANOSA UK should be considered non-scalable and for illustrative purposes only. Issued design principals form instructions for the installation of DANOSA UK materials only and should be considered as part of an overall design rather than in isolation. Product 'Technical Datasheets' are available for all DANOSA UK products and should be consulted in conjunction with all issued DANOSA UK installation instructions. Drawings are subject to copyright and should not be reproduced without permission.

Drawing Notes:

All substrates should be primed with BITUMEN PRIMER HM. Structural substrates shown in this drawing are for illustrative purposes only.

All POLYDAN and ESTERDAN membrane side overlaps should be a minimum of 80mm and head laps a minimum of 100mm.

All laps and cross joints should be staggered by a minimum of 300mm.

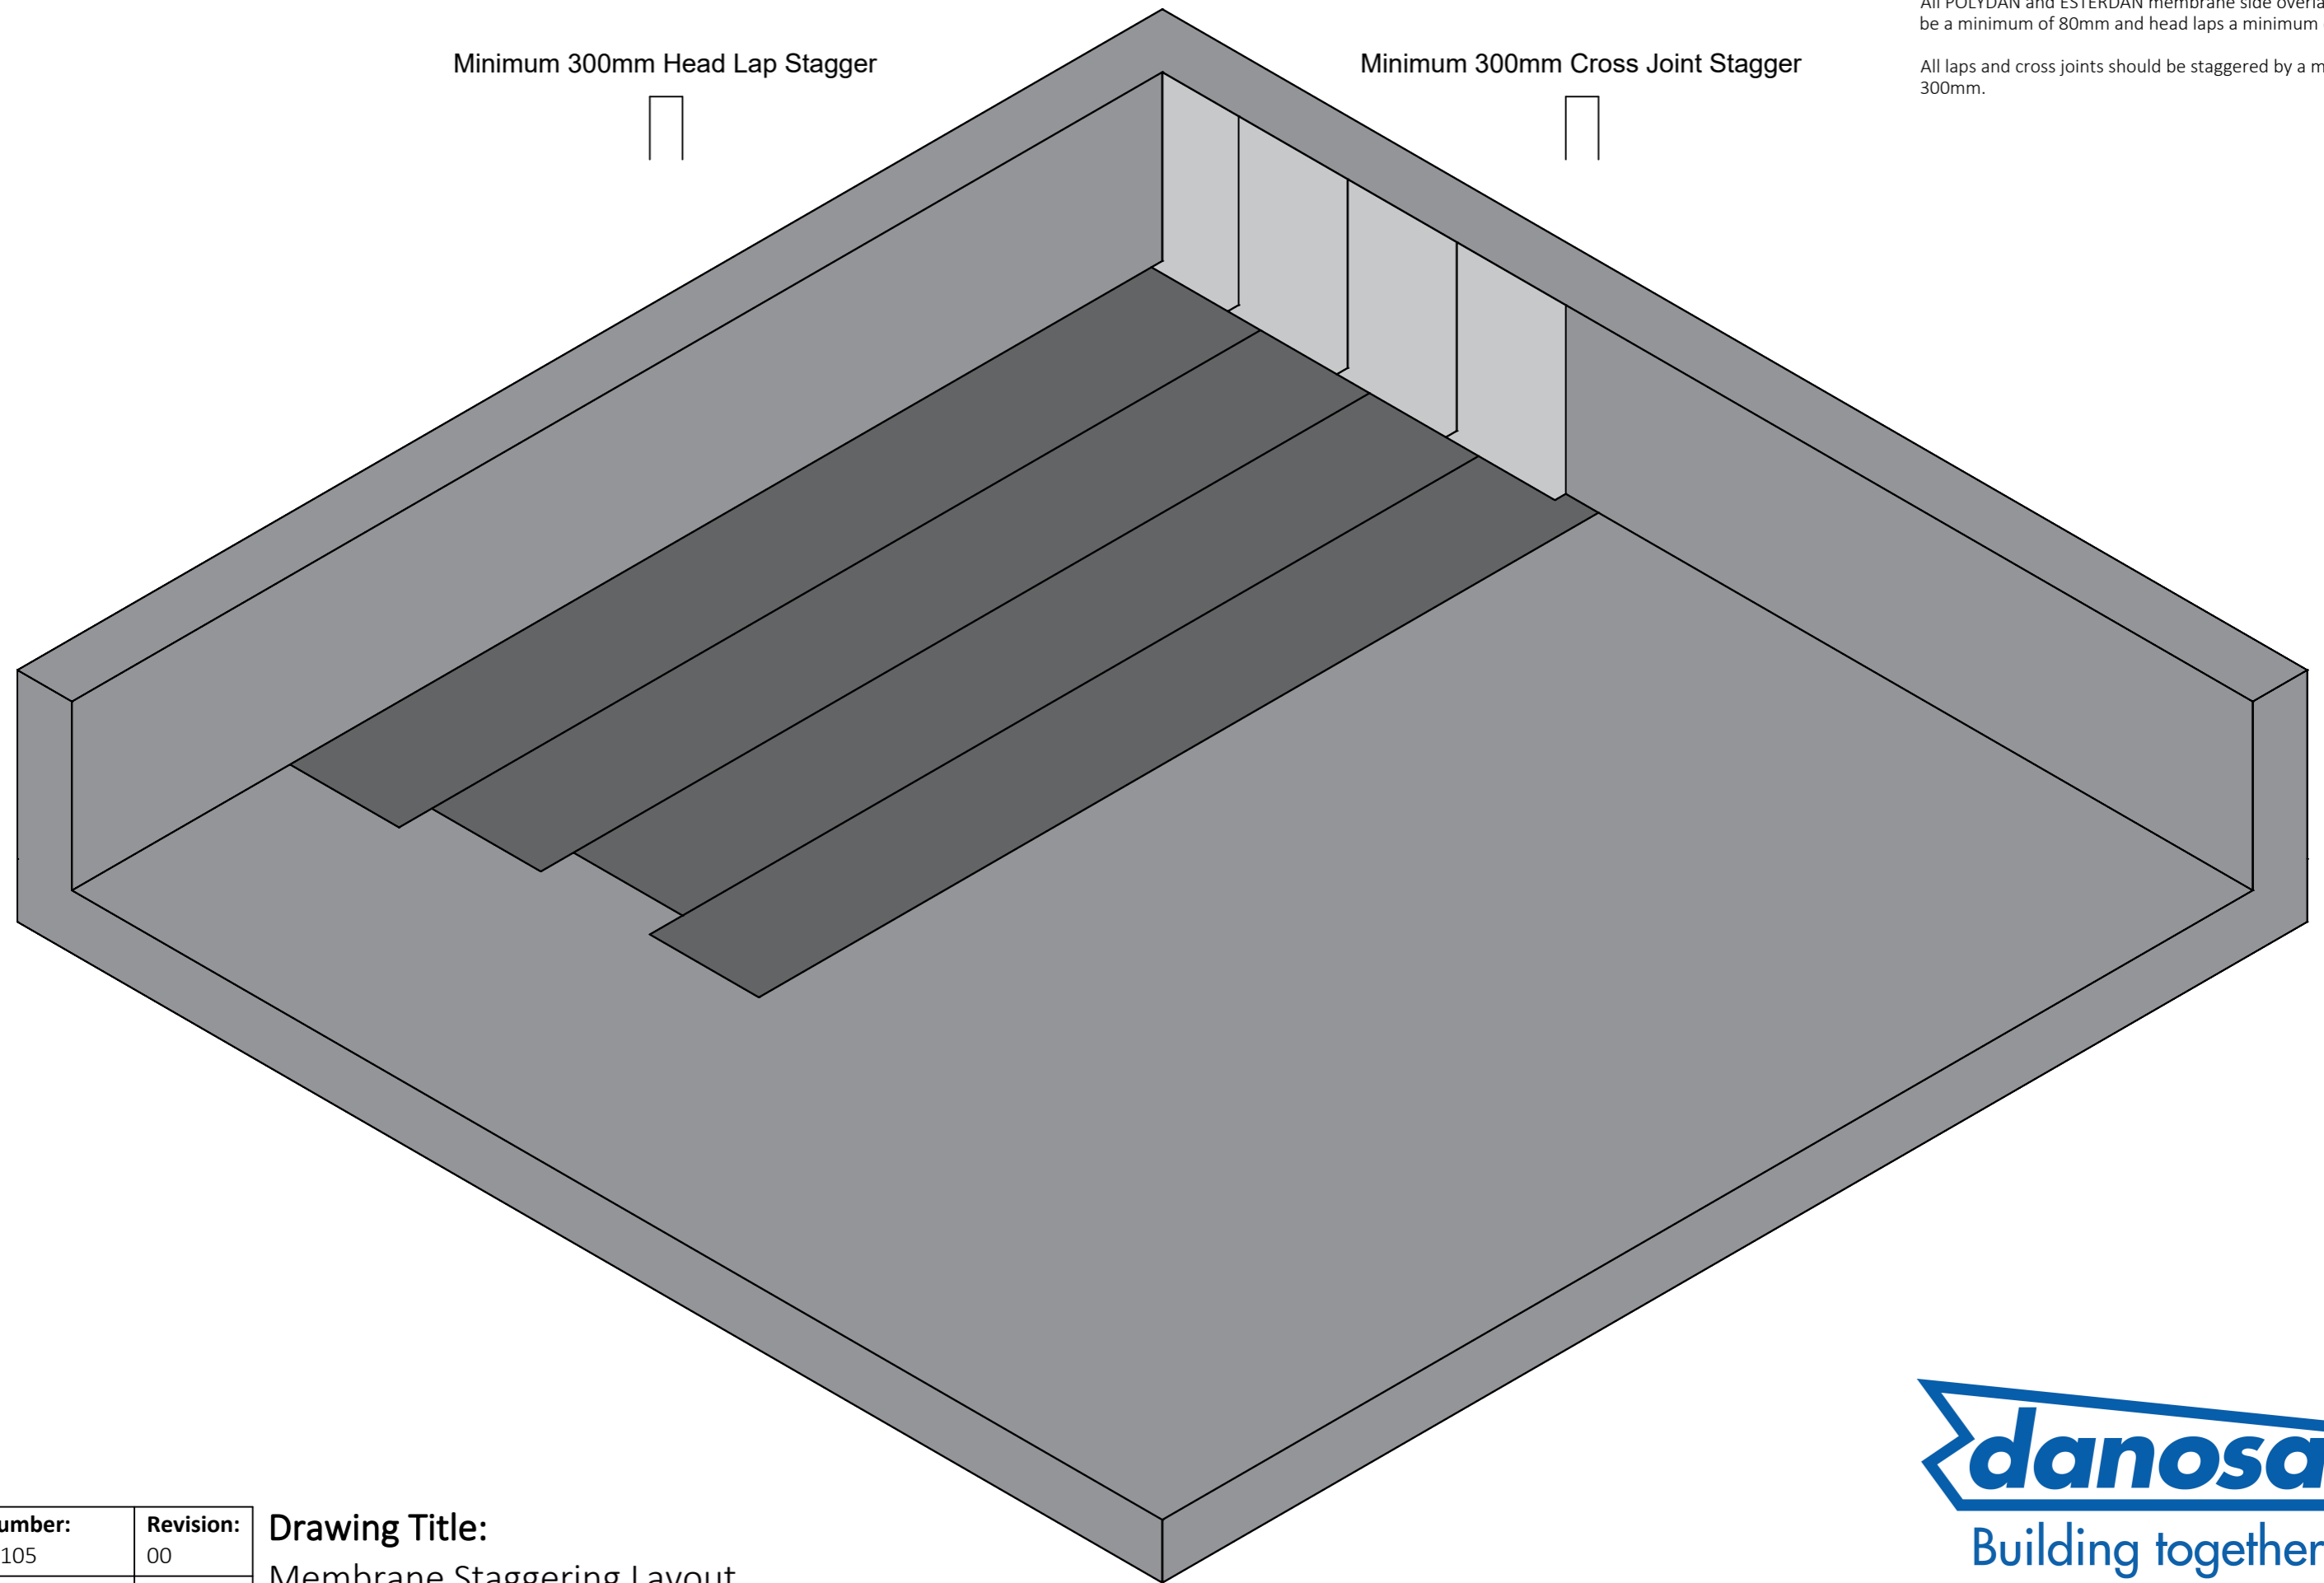

Minimum 300mm Head Lap Stagger



Minimum 300mm Cross Joint Stagger



Drawing Number: DUK-D-(G)-105	Revision: 00
Date Drawn: February 2019	Author: SL

Drawing Title:
Membrane Staggering Layout
DURA-DAN® Structural Hot Melt

