

Disclaimer: Drawings produced by DANOSA UK should be considered non-scalable and for illustrative purposes only. Issued design principals form instructions for the installation of DANOSA UK materials only and should be considered as part of an overall design rather than in isolation. Product 'Technical Datasheets' are available for all DANOSA UK products and should be consulted in conjunction with all issued DANOSA UK installation instructions. Drawings are subject to copyright and should not be reproduced without permission.

Drawing Notes:

All substrates should be primed with BITUMEN PRIMER HM. Structural substrates shown in this drawing are for illustrative purposes only.

20-40mm round washed stone covering shown for illustrative purposes only.


All POLYDAN and ESTERDAN membrane side overlaps should be a minimum of 80mm and head laps a minimum of 100mm.

Insulation cut-outs shown for illustrative purposes only.

Note A:
A row of paving slabs are required at the perimeter to hold the retaining angle in place. Paving slabs should be a minimum 50mm thick.

Note B:
DANOFLOW should be turned up at perimeters to the full height of the coverings.

Note C:
ESTERDAN 30/P ELAST AUTOADHESIVO does not form part of the system for concrete to concrete changes of plane, or where no structural movement is anticipated. The product should be bonded a minimum of 100mm onto both substrates. Where movement is likely to be more than 10mm in each plane, please speak to our technical department.

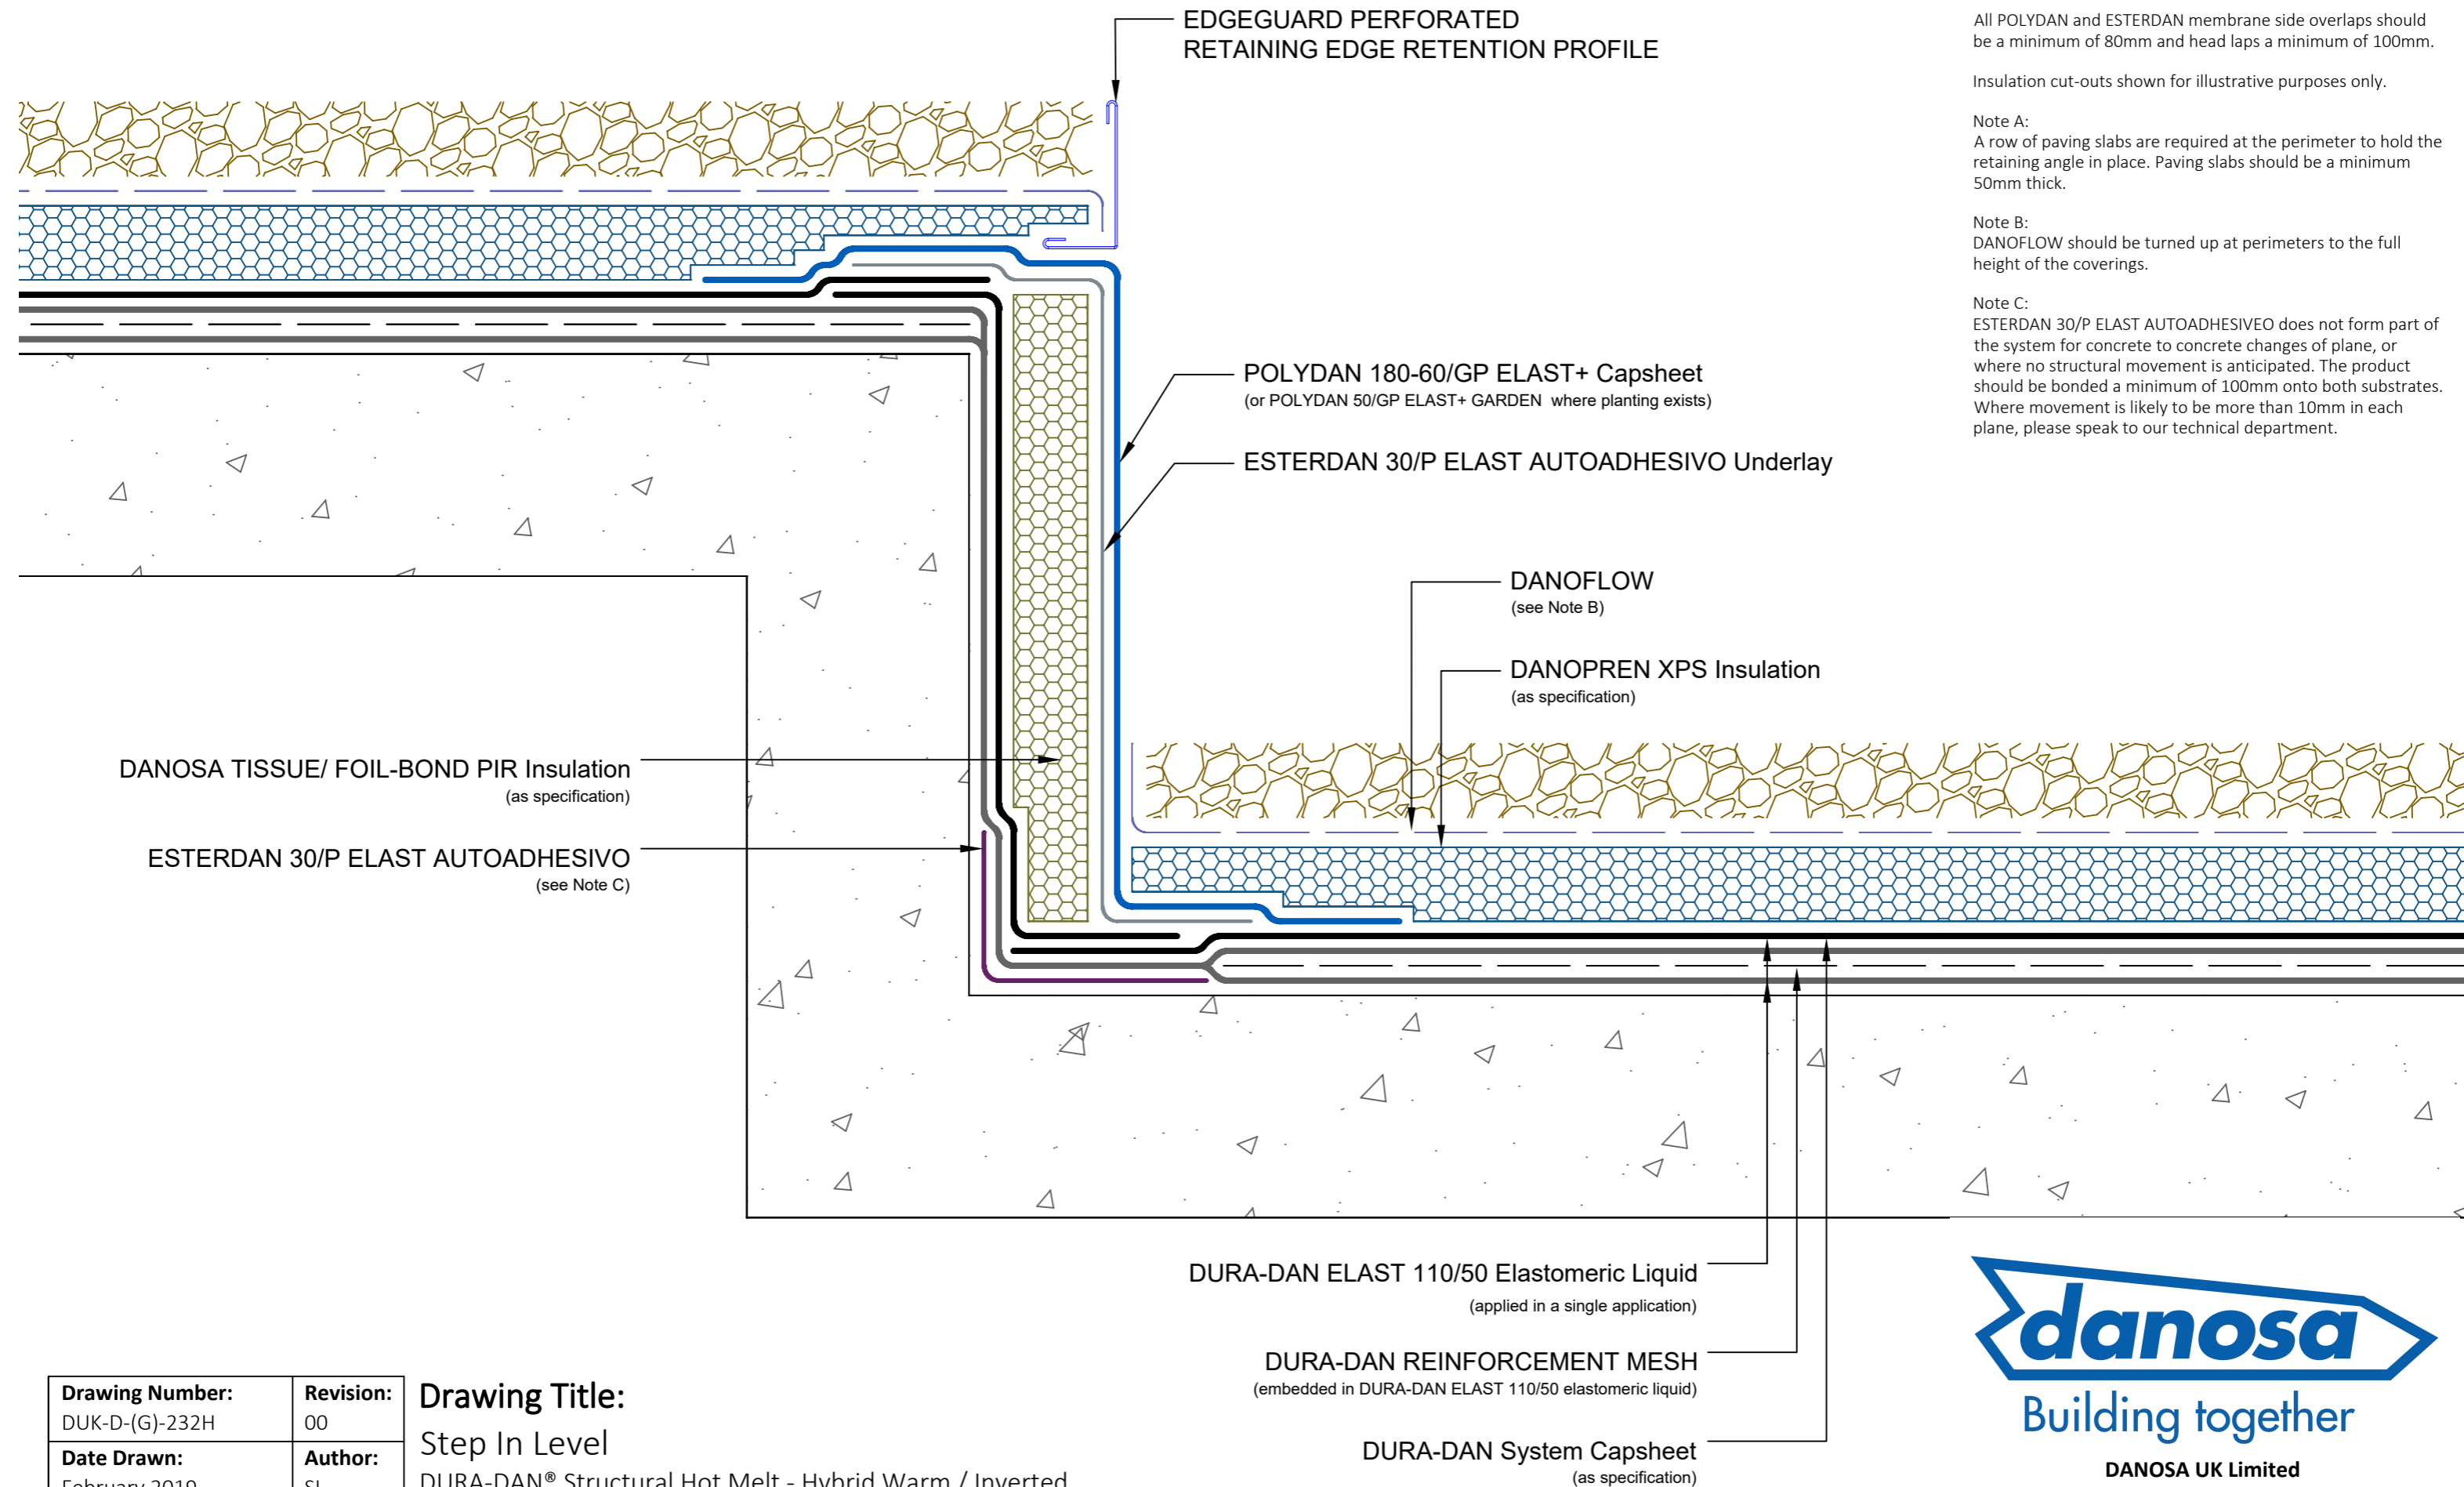

Drawing Number: DUK-D-(G)-232H	Revision: 00
Date Drawn: February 2019	Author: SL

Drawing Title:
Step In Level
DURA-DAN® Structural Hot Melt - Hybrid Warm / Inverted

DURA-DAN ELAST 110/50 Elastomeric Liquid
(applied in a single application)

DURA-DAN REINFORCEMENT MESH
(embedded in DURA-DAN ELAST 110/50 elastomeric liquid)

DURA-DAN System Capsheet
(as specification)

