

Drawing Notes:


All substrates should be primed or prepared in accordance with the project specification. Structural substrates shown in this drawing are for illustrative purposes only.

Note A:
Where a full bond to the substrate is required, or where ESTERDAN 30 P ELAST SEMIADHESVIO is used as the underlay, GLASDAN 800 PERFORADO does not form part of the system.

Note B:
Trim to be mechanically fastened at 200mm centres. Various profiles, colours and finishes are available. Profile shown for illustrative purposes only.

Lead Flashing
Pre-Formed Trim (see Note B)
GLASDAN 800 PERFORADO 100mm Exclusion Zone
DANOSA Capsheet (as specification)
DANOSA Underlay (as specification)
GLASDAN 800 PERFORADO (see Note A)

Air and Vapour Control Layer (as specification)
Insulation (as specification)

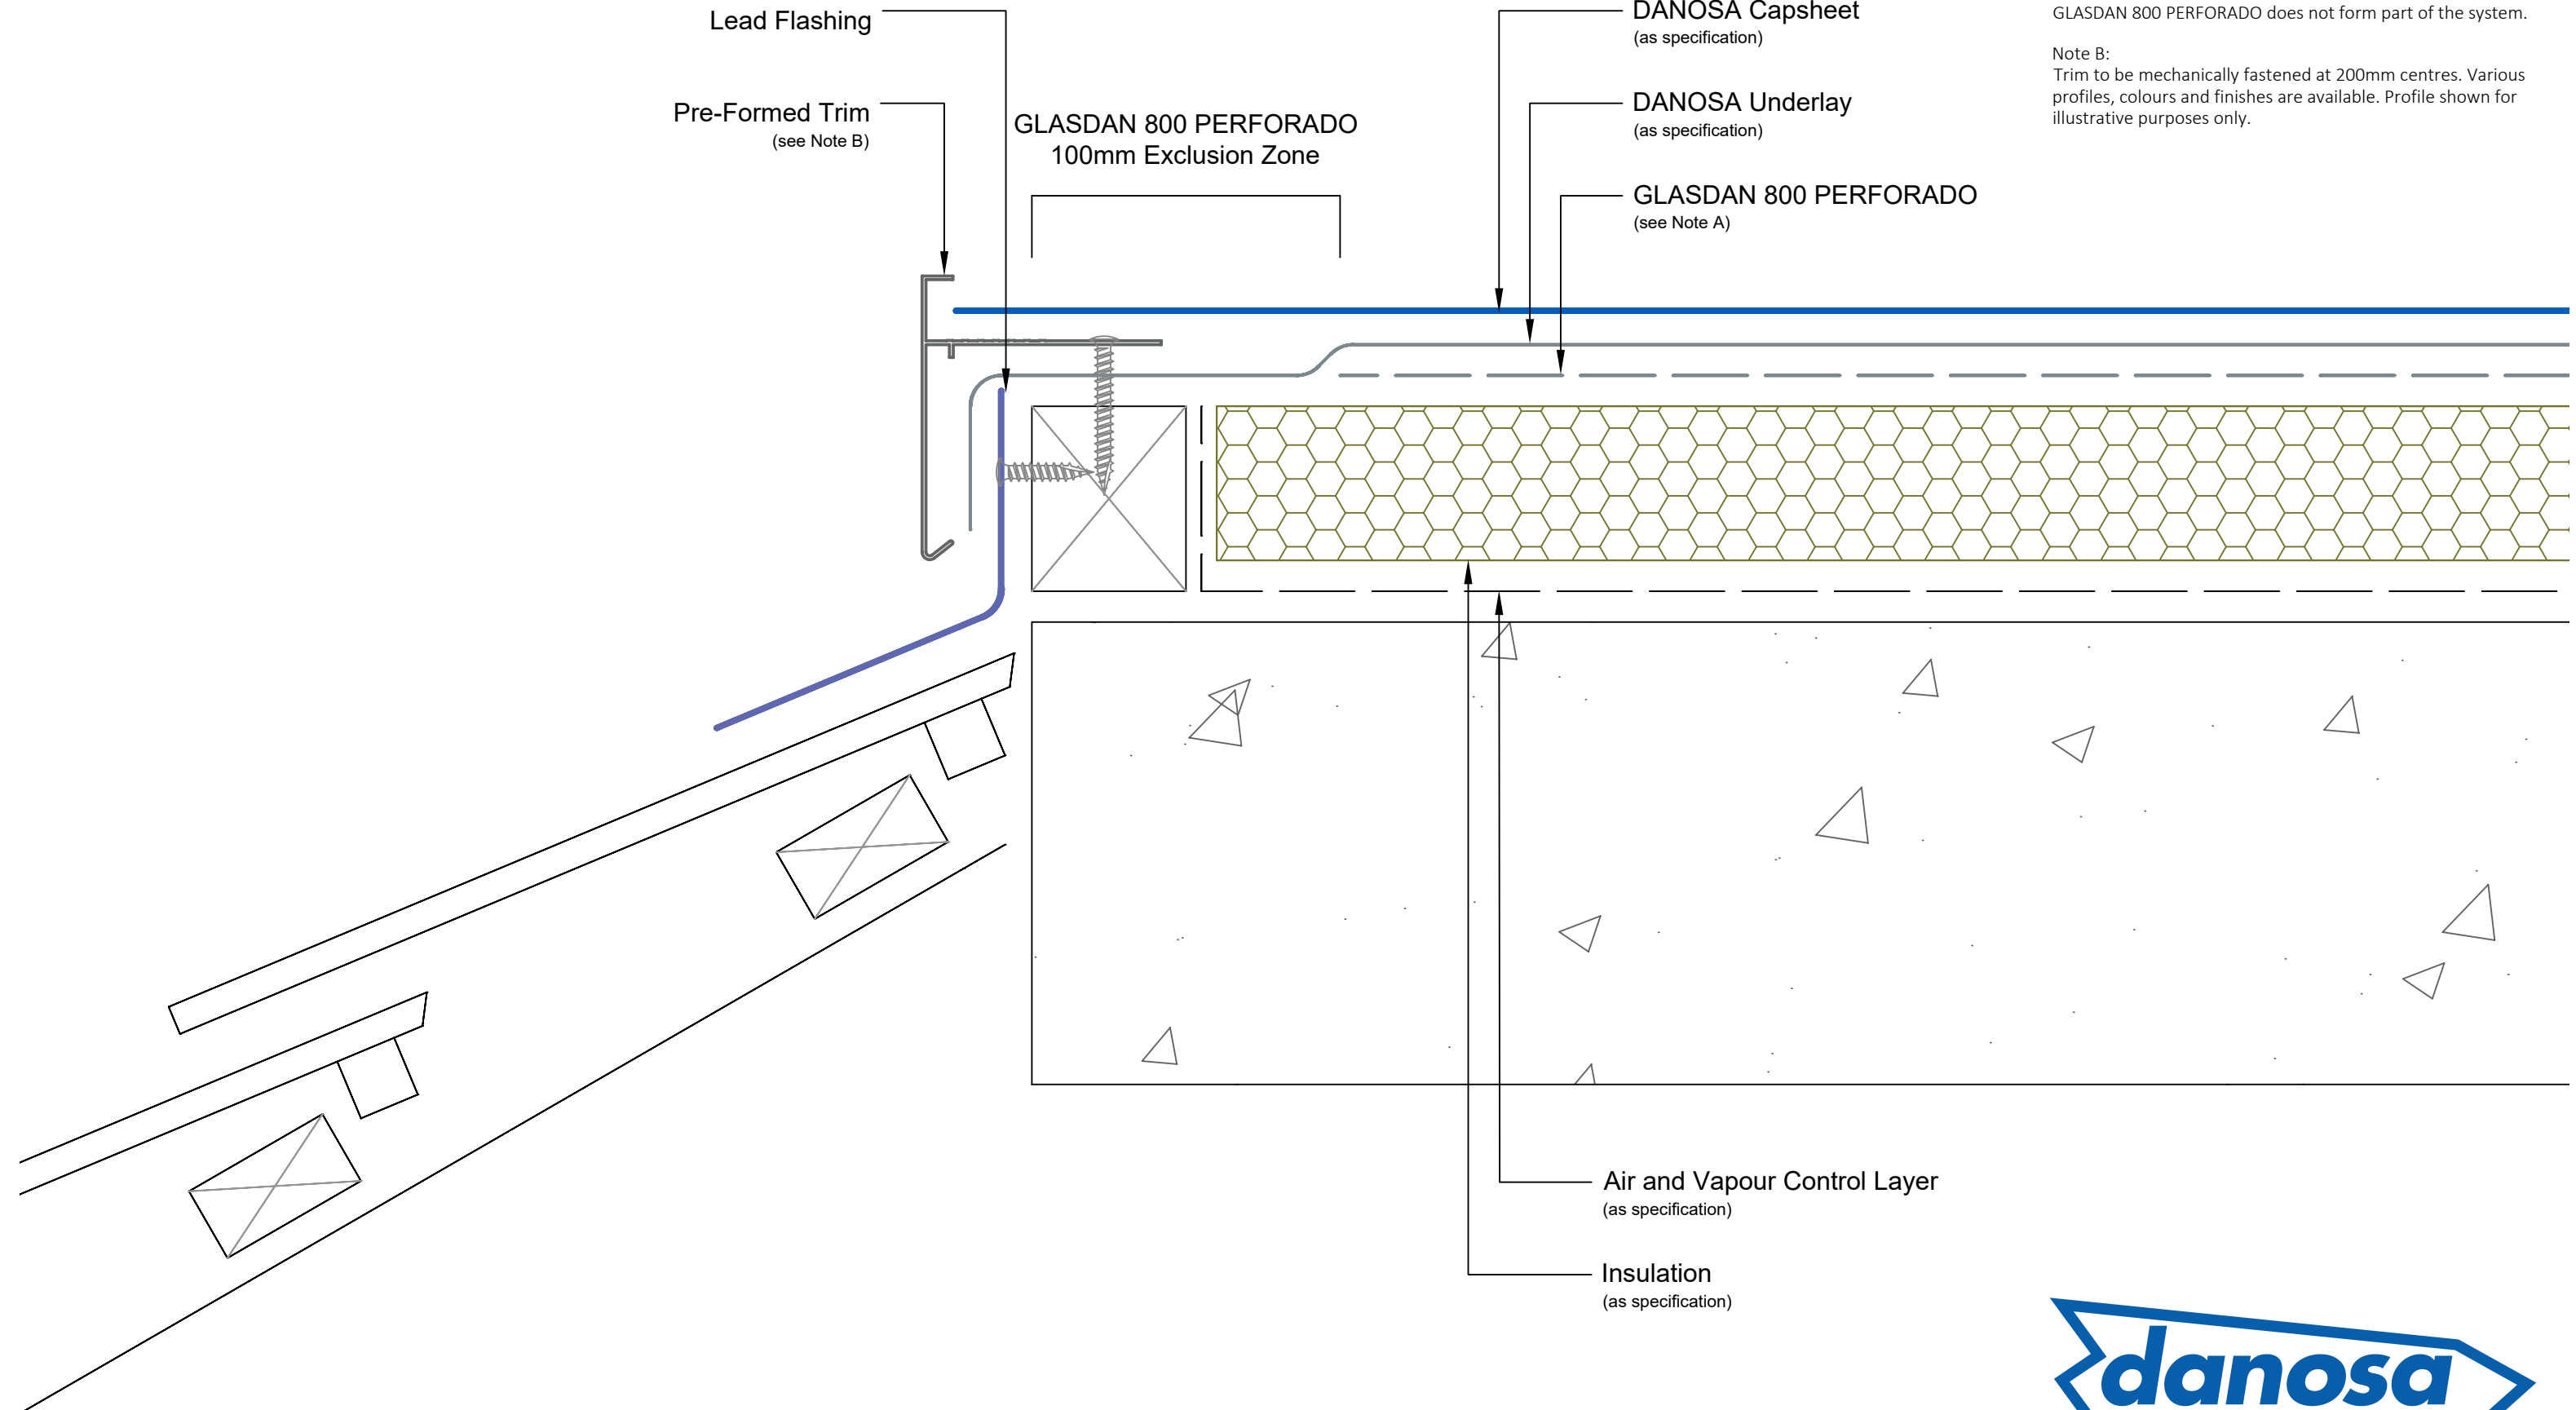

Drawing Number: DUK-B-(G)-223W	Revision: 01
Date Drawn: February 2019	Author: SL

Drawing Title:
Junction with Mansard
Reinforced Bitumen Membranes - Warm Roof

